



Undercarriage Cleaner


Replacement Nozzle
Manual #22.5013

Included

- 4 SS 1/4" male size 1.3 nozzles
- 1/4" male high pressure filter
- teflon tape



What you'll need: crescent wrench, socket wrench, and 9/16" socket.

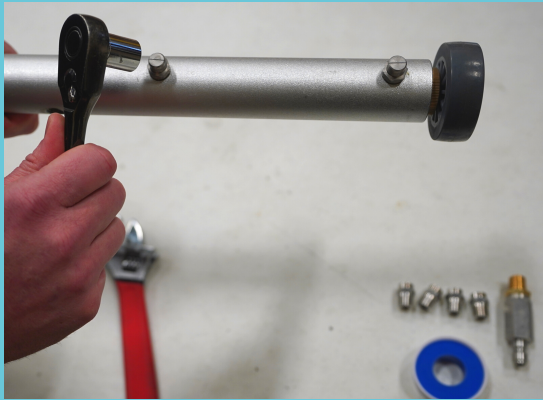

Remove original nozzles and plug - clean female threads of the chamber



Use air pressure to clear the chamber




Wrap the threads of your new nozzles and filter with 4 wraps of teflon tape



Insert the new nozzles into nozzle holes



Tighten each nozzle

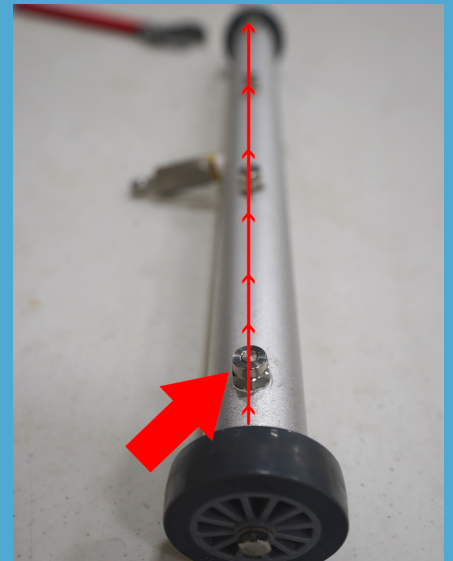

Confirm that the nozzle spray pattern is straight