

PROFESSIONAL SAND BLAST KIT




Technical data:

max Pressure	4050 psi
max Flow	10,5 USgpm
max Temperature	195° F

Part number	16.0206	16.0207	16.0208	16.0209	16.0210	16.0211	16.0212
Capacity size	2.0	3.0	3.5	4.0	4.5	5.0	6.0
Nozzle diameter	1 mm	1,2 mm	1,3 mm	1,4 mm	1,5 mm	1,6 mm	1,7 mm

Exploded view and components list

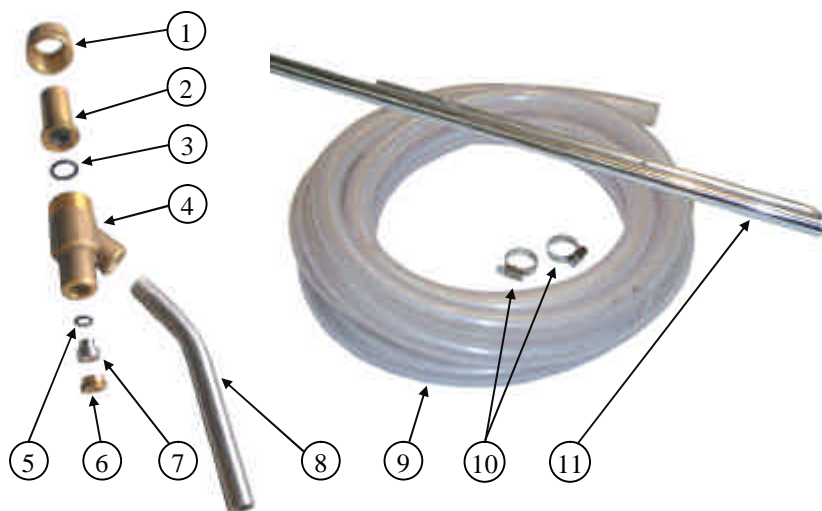

Item	Q.ty	Description
1	1	Nozzle holder blocking ring nut
2	2	Brass nozzle holder with tungsten carbide nozzle cone
3	1	O-ring Ø13,1x2,62
4	2	1/4"F inlet sand blast body
5	1	O-ring Ø6,75x1,78
6	1	1/4" blocking nozzle plug
7	1	Stainless steel nozzle
8	1	1/4"M x Ø13 hose barb zinc plated pipe
9	1	20'of 1/2"clear nylon braided tube
10	1	1/2" steel plated hose clamp
11	1	Sand probe

WARNING:

When using this product always exercise basic safety precautions, including the following:

- This is a high pressure spraying system tool; water and chemicals under high pressure, can cause severe injury if not properly used. To prevent injury, do not point the product at any part of your body or at any other person when in operation; the pressure from your machine can cut skin and cause burns. Keep all persons away from the pressure washing machine and the spray area of the product.
- Make sure that the product is securely connected to your pressure washer machine.
- Do not climb on ladders when using this tool.
- If water should stop flowing from the product, turn unit off immediately; make sure all pressure is off of the pressure washing hose and gun before you disconnect the tool.
- Always follow OSHA regulation when using a pressure washer.
- Always use genuine MTM Hydro INC parts for replacement

MTM Hydro reserves the right to make any modification to products and manuals without notice.